


Milan: Pop-Up Socket Range


Please read carefully before installation

What's Included:


1 x Milan Pop-Up Socket and 170mm Mains Lead with 13A plug fitted

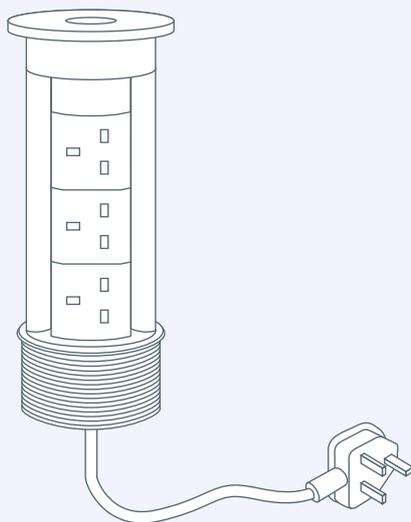


1 x Threaded Shoulder Washer



1 x Flush Fit Adaptor Ring



1 x Bag of Screws



1 x Manufacturers Fitting Instructions



Congratulations on the purchase of your Milan Pop Up Socket, we hope you're pleased with your item and it compliments your installation. Due to its versatile nature, the Milan can either be hard wired directly to the mains or used as a deluxe extension socket as it's already fitted with a mains plug – please bear in mind that although the Milan is available as a special order to suit other electrical systems, this particular model is designed for the UK 240v 3-Pin Plug system only.

Important Information:

- Don't remove protective film from the cover disc until you are sure you're planning to keep the unit.
- Please ensure there is enough space available underneath the unit prior to installation to accommodate the shoulder washer. There must also be enough space for the mains lead (and a data cable on certain models) to run unhindered.
- The unit is designed around worktop thicknesses of between 20mm and 55mm.
- When removing the protective film from the chrome top by hand, do not use any sharp instruments or they will scratch / damage the chrome top.

***Protect your unit by keeping the plug inserted at all times, until ready for use.**


Returns Procedure:

If you are in any way dissatisfied with the unit, then you are welcome to return it. In order to receive a full refund on the cost of the unit itself, please ensure you take the following important steps:

1. The unit including shoulder washer and flush fit adaptor are returned, still in the original box and in a saleable / unused condition.
2. **Please ensure the 3 pin plug is inserted back into one of the sockets, to prevent the unit being scratched by a stray plug. Failure to do this, will likely damage the unit and affect our ability to refund!***

3. The protective film remains in position on top of the chrome top.
4. Send the unit back to BPF's Alkerton Oaks Warehouse using an insured, signed for service with all packaging, paperwork along with a cover note explaining why you are returning the unit, this will help speed up the returns process. We can't action any refunds until the unit has been signed for at our warehouse and inspected by our quality control department.

In the unlikely event of a fault occurring within the 12 month guarantee period, please take as many of the steps above as possible, before sending the unit back.

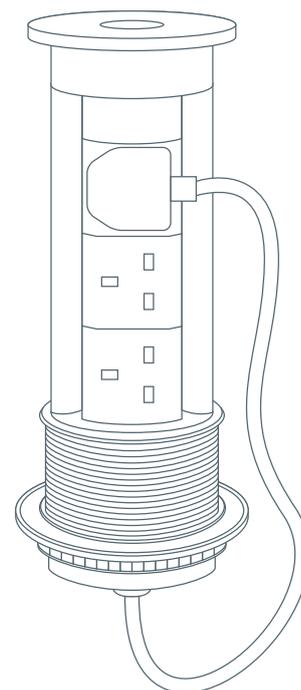

Installation Guide:


Before you start

Please ensure:

You have room on top for a hole size of 124mm (or 101mm if not using the flush fit adaptor)


When a suitable location is selected you have room to cut a 124mm (flush fit) or 101mm (non-flush fit) dia hole in the worktop

There will be enough space below for the unit to fully retract and for the leads to run unhindered from the base of the unit

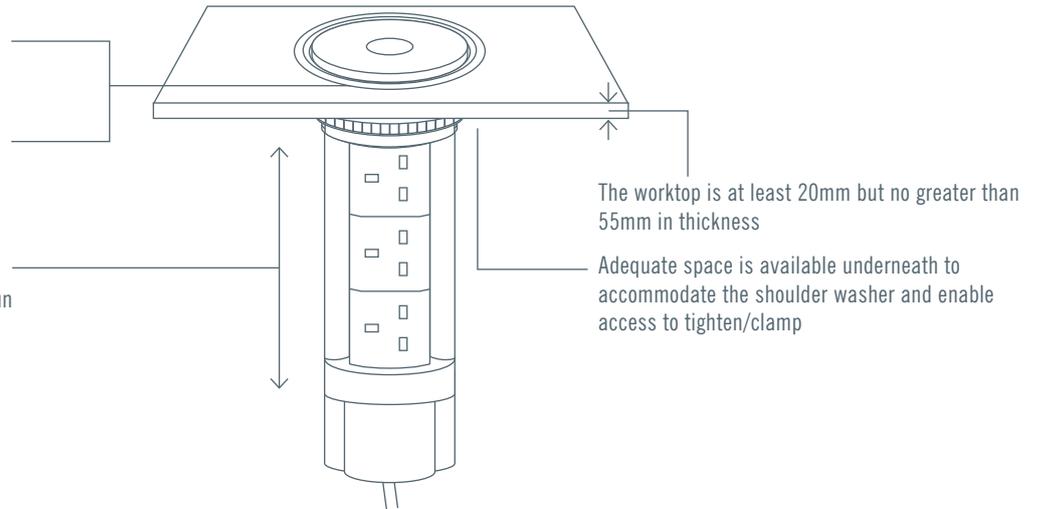


Steps:


1. Unscrew shoulder washer from the unit

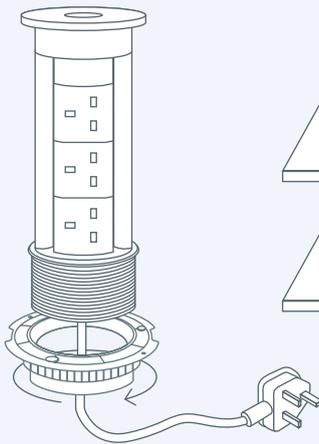


2. Position flush fit adaptor into hole




3. Insert unit into hole

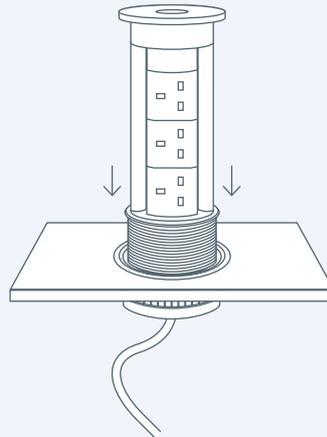


4. Screw shoulder washer onto underside of unit and tighten into place

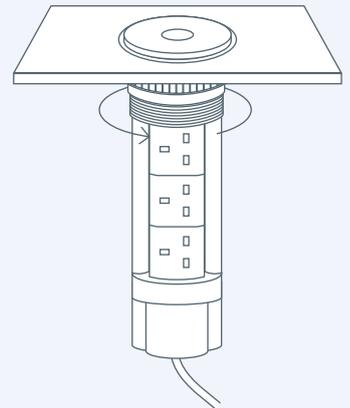


5. Optional – Fix shoulder washer to underside of surface with provided screws, subject to worktop type

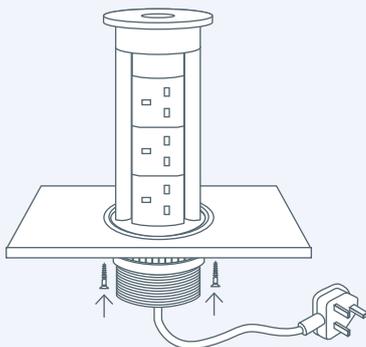

6. Connect mains plug to power supply and switch on



7. Remove protective film from cover disc **by hand**

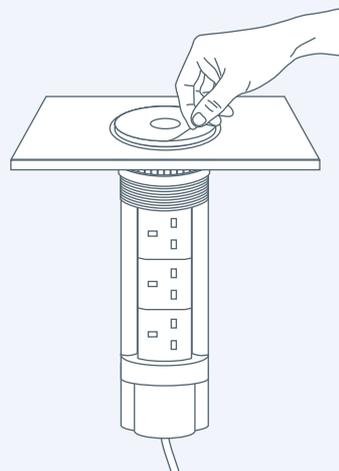

8. Unit is now ready to use

