
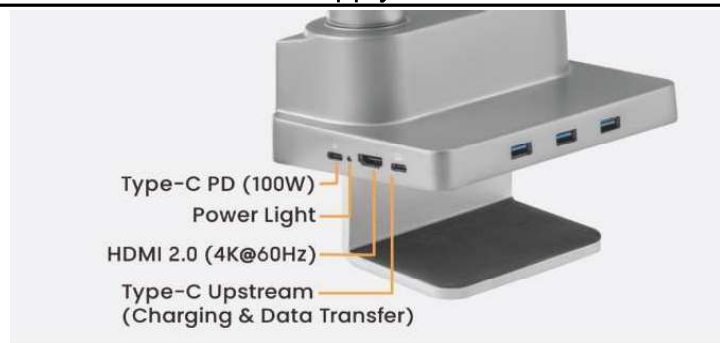


Title	Single LCD Gas Arm w/ Top-loading Desk Clamp & Integrated USB C Dock	Dual LCD Gas Arm w/ Top-loading Desk Clamp & Integrated USB C Dock
Arm Assembly		
LCD size	1x 17"- 32" LCD/LED	2x 17"- 32" LCD/LED
VESA	75x75, 100x100 mm	
Height Range	195-515mm / 7.7" - 20.3"	
Max Reach	506mm / 19.9"	
Max Load	9 KG/ 19.8 lbs per arm	
Features	Rotate the monitor to change orientation (portrait/landscape); Quick-release VESA plate; Tilt ±40°; free swivel/ rotate/ pan	
Desk mount	Top-loading desk clamp or grommet mount	
USB C Dock - Ports		
USB C	1x type-C upstream full feature port, laptop charging up to 80W	
	1x power-delivery port, up to 100W PD charging per dock	
USB A	2x USB-A 3.1 Gen1 data and charging (5V,0.9A max)	3x USB-A 3.1 Gen1 data and charging (5V,0.9A max)
HDMI	1x HDMI 2.0 port, max resolution 4K@60Hz	2x HDMI 2.0 ports, max resolution 4K@60Hz (2K@60Hz if both connected)
RJ45	1x Gigabit ethernet port, 10Mbit/100Mbit/1Gbit	
Power Light	The light is on when powered	
USB C Dock - Supported Devices		
PCs	Windows 7/ 8.1/ 10/ 11 (32bit/64bit); with DP1.2 or MHL output (over USB C)	
MACs	Apple OS X, with Thunderbolt 3 (over USB C)	
Phones / Tablet	Android, with DP1.2 or MHL output (over USB C)	
USB C Dock - Environment		
Temperature	Operating: 0°C to 40°C; Non-Operating: -20°C to 60°C	
Humidity	Operativging: 10% to 80% (non-condensing 5 to 35°C); Non-operating: 5% to 90% (non-condensing -20 to 60°C)	
Altitude	Sea level to 5000m	
Regulations	Designed to meet RoHS and WEEE directives	
USB C Dock - Accessories		
Included	1x full feature USB C cable - 1.0m in length	
Optional	65W/100W USD C PD Power Supply	

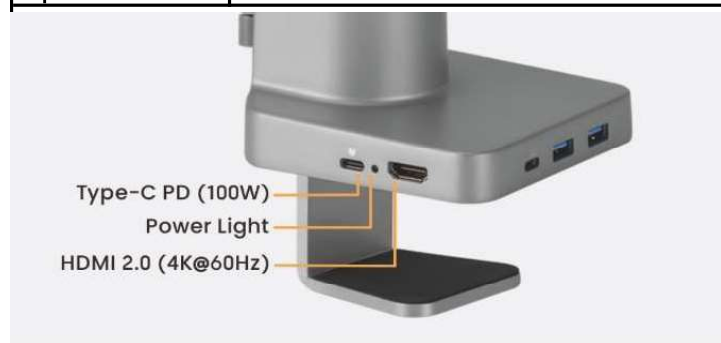

*Not all laptops and mobile phones with USB-C ports support full USB-C features.

**Laptops and mobile phones have different combinations of USB-C features.

*** Specification subject to change without prior notification.